

KOSILICA - MALČER ZA TRAVU I KOROV
ZA RAD NA KOSIM POVRŠINAMA

GS 40S



GRAMIP



GS 40S


80<100<120<140<160

TRADICIJA KVALITETE

TEHNOLOGIJA BUDUĆNOSTI

TEHNIČKE KARAKTERISTIKE MALERA GS40S:

- Priključni okvir kat. 1, naprijed, nazad
- Maler se nalazi bočno desno iza traktora
- Hidraulički nagib od -65° do $+90^\circ$
- Hidraulički pomak do 35 cm
- Automatski prihvat u transportnom položaju
- Uporaba svih hidrauličkih funkcija preko hidraulike traktora
- Stabilno čelično kućište s zaštitom od tvrde gume
- Zatvoreni rotor sa stjenkom debljine 8 mm
- Noževi „GARDEN“ za čist i savršen rez
- Nosači noževa pomaknuti unazad, zavareni na rotor
- Samo čelični pojačani valjak debele stijenke
- Klizni, ugrađeni protunoževi
- Oslonac, kran
- Zaštita od naglog starta u reduktoru
- Radni broj okretaja 540 o/min. (moguće 1000 o/min.)
- Za korištenje na traktoru potrebno: 2 dvostruka upravljačka ventila

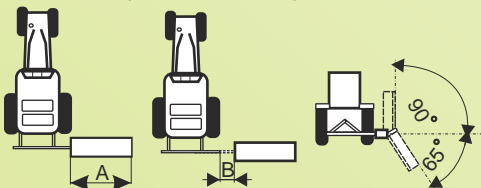

A Širina malera	80 cm	100 cm	120 cm	140 cm	160 cm
B Bočni pomak u desno	35 cm	35 cm	35 cm	35 cm	35 cm

Model	Radna širina	Bočni pomak	Težina	Noževi	Min. potrebna snaga	
					540 o/min.	1000 o/min.
GS40-S-80	80 cm	35 cm	282 kg	12	20 - 40 KS	do 50 KS
GS40-S-100	100 cm	35 cm	302 kg	16	24 - 40 KS	do 50 KS
GS40-S-120	120 cm	35 cm	322 kg	18	28 - 45 KS	do 60 KS
GS40-S-140	140 cm	35 cm	342 kg	20	32 - 45 KS	do 60 KS
GS40-S-160	160 cm	35 cm	362 kg	24	35 - 50 KS	do 60 KS



GRAMIP

TVORNICA POLJOPRIVREDNIH STROJEVA

Radni ka 33
10342 DUBRAVA, Hrvatska
Tel.: +385 (0)1 2725 122 - Fax: +385 (0)1 2725 269
Internet: www.gramip.hr - e-mail: gramip@gramip.hr