

**KOSILICA - MALČER ZA TRAVU I KOROV
ZA RAD NA KOSIM POVRŠINAMA**

GS 45S




GRAMIP

GS 45S 80<100<120<140<160

TEHNIČKE KARAKTERISTIKE MALERA GS45S:

- Prikapanje trešnja ka Kat. 1, naprijed, nazad
- Maler se nalazi bočno desno iza traktora
- Hidraulički nagib od -65° do $+90^\circ$
- Hidraulični pomak do 35 cm
- Automatski prihvat u transportnom položaju
- Uporaba svih hidrauličkih funkcija preko hidraulike traktora
- Stabilno elinokulisti, zaštita od tvrde gume
- Zatvoreni rotor sa stijenkom debljine 8 mm
- Teški AT-ekipnici (640 grama), samooštrici
- Nosač i noževa pomaknuti unazad, zavareni na rotor
- Pojan valjak debljine stijenke 5mm, samo iste
- Kliznici
- Ugrađeni protunoževi, oslonac, kran
- Zaštita od naglog starta u reduktoru
- Radni broj okretaja 540 o/min. (moguće 1000 o/min.)
- Za korištenje na traktoru potrebna dva dvostruka upravljačka ventila
- Max.debljina usitnjavanja do 3,5 cm

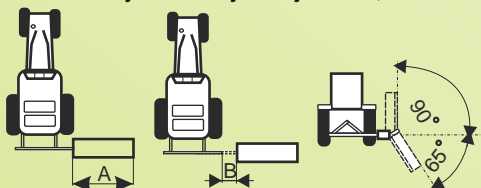

A Širina malera	80 cm	100 cm	120 cm	140 cm	160 cm
B Bočni pomak u desno	35 cm	35 cm	35 cm	35 cm	35 cm

Model	Radna širina	Bočni pomak	Težina	Noževi	Min. potrebna snaga	
					540 o/min.	1000 o/min.
GS45-S-80	80 cm	35 cm	282 kg	12	20 - 40 KS	do 50 KS
GS45-S-100	100 cm	35 cm	302 kg	16	24 - 40 KS	do 50 KS
GS45-S-120	120 cm	35 cm	322 kg	18	28 - 45 KS	do 60 KS
GS45-S-140	140 cm	35 cm	342 kg	20	32 - 45 KS	do 60 KS
GS45-S-160	160 cm	35 cm	362 kg	24	35 - 50 KS	do 60 KS



GRAMIP

TVORNICA POLJOPRIVREDNIH STROJEVA

Radni ka 33

10342 DUBRAVA, Hrvatska

Tel.: +385 (0)1 2725 122 - Fax: +385 (0)1 2725 269

Internet: www.gramip.hr - e-mail: gramip@gramip.hr